

SURFACE DESIGN

FEINSTRATOS FINE STRATOS

... A CHOICE OF TEXTURE AND ACOUSTIC EXPRESSION

AMF-THERMATEX FINE STRATOS is a lightly textured sanded tile with a clean, crisp appearance. Micro-perforations give high sound absorption while the plain tile offers a contemporary ceiling design.



AMF Project Vedior, France

FINE STRATOS

FINE STRATOS MICRO-PERFORATED



PERFORMANCE CEILINGS

More scope for innovation

SURFACE DESIGN

AVAILABLE AS

SUSPENSION SYSTEM



FEINSTRATOS

FINE STRATOS

THERMATEx

Ceiling tiles made from new generation bio-soluble mineral wool, clay and starch with excellent fire resistance and acoustic performance.



SYSTEM A CONCEALED SYSTEM
Grid concealed,
panels non-removable GN
panels removable AW / GN



SYSTEM C EXPOSED SYSTEM
For 15 or 24 mm wide sections,
demountable ceiling



SYSTEM F FREE SPAN SYSTEM
Clear span plank system, with
exposed or concealed suspension



SYSTEM I BANDRAFTER SYSTEM
With parallel sections 50–150 mm
wide and concealed cross sections



SYSTEM F30 uno FIRE PREVENTION SYSTEM
an independent ceiling giving
fire protection from above and
below



SYSTEM F30 mono FIRE PREVENTION SYSTEM
an independent ceiling giving
fire protection from above and
below



SYSTEM F30 dual FIRE PREVENTION SYSTEM
an independent ceiling giving
fire protection from above and
below



SYSTEM F90 dual FIRE PREVENTION SYSTEM
an independent ceiling giving
fire protection from above and
below




Knauf AMF GmbH & Co. KG
is certified in accordance with
Quality Assurance Standard
ISO 9001 and ISO 14001



The RAL Seal of Approval gives
assurance that mineral panels are
regularly checked for quality,
safety and fire protection

TECHNICAL PERFORMANCE

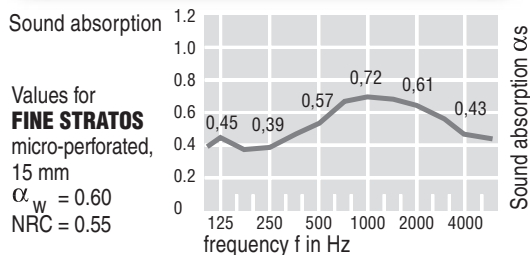

FIRE Class 1 Surface Spread of Flame to BS 476: Part 7: 1987. Class 0 as defined by Building Regulations, 1987. Class B 1 as DIN EN 4102, part 1, Class A2 as per DIN EN 4102, part 1



THERMAL Thermal conductivity
 $\lambda = 0.052 - 0.057 \text{ W/mK}$



LIGHT Up to 90%



SOUND ABSORPTION Sound absorption as per
BS EN ISO 354: 2003



SOUND ATTENUATION Sound attenuation as per
BS EN 20140-9: 1994,
 $D_{n,c,w} = 34 \text{ dB}$ (thickness 15 mm)



HUMIDITY Humidity resistant panels
up to 95% RH

SPECIAL PROPERTIES



FIRE Fire protection up to 1 hour in
accordance with BS 476:
Parts 20-23; 1987. Fire resistance
F30-F120 to DIN 4102, part 2.



HYGIENE HYGENA - bactericidal
and fungicidal treatment

DIMENSIONS, PANEL THICKNESS

Standard Sizes: 600 x 600 mm / 625 x 625 mm / 600 x 1200 mm / 625 x 1250 mm
Panel sizes: 300 x 1200 mm – 2500 mm / 312.5 x 1250 mm – 2500 mm
400 x 1200 mm – 2500 mm, other sizes to order
Thickness / Weight: 15 mm (c. 4.5 kg/m²) / 19 mm (c. 5.7 kg/m²) / 40 mm (c. 12 kg/m²)
Colour: White similar to RAL 9010, other colours available to order

All specifications are subject to change without notice.

Ceiling installation must be as described in the relevant test reports and assessments.

Knauf AMF GmbH & Co. KG
Elsenthal 15
D-94481 Grafenau
Germany
Telephone +49 (0) 85 52 / 422 - 0
Fax +49 (0) 85 52 / 422 - 32
e-mail: info@amf-grafenau.de
http://www.amfceilings.com

AMF Ceilings Ltd.
Unit 10, Tideway Yard
125 Mortlake High Street
Barnes, London SW14 8SN

Tel.: 020 8392 8844
Fax: 020 8878 2012
e-mail: sales@amfceilings.co.uk
http://www.amfceilings.com



PERFORMANCE CEILINGS

More scope for innovation